


## Indoor Communication Cable(GJFJZH) Cable Design

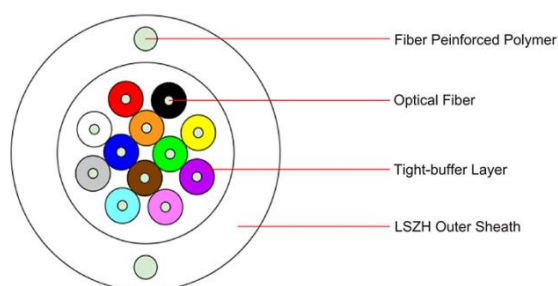

### Technical Data

No. of Fibers		2	4	6	8	10	12
Fiber Type		G652D	G652D	G652D	G652D	G652D	G652D
Tight lines	Material	PVC	PVC	PVC	PVC	PVC	PVC
	Diameter (±0.05) mm	0.9	0.9	0.9	0.9	0.9	0.9
Strength Member	Material	FRP	FRP	FRP	FRP	FRP	FRP
Outer Sheath	Material	LSZH	LSZH	LSZH	LSZH	LSZH	LSZH
	Thickness (±0.05) mm	1.2	1.2	1.2	1.2	1.2	1.2
	Color	White	White	White	White	White	White
Cable Diameter (±0.2) mm		7.0	7.0	7.5	9.0	9.5	10.0
Cable Weight (±5) kg/km		45	45	50	80	88	95
Temperature range (°C) 温度范围	Installation 安装	-20~+50					
	Transport&Storage 运输与储存	-20~+60					
	Operation 工作	-20~+60					

### Tight lines Color 紧套色谱

No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua
No.	13	14	15	16	17	18
Color	Blue+P	Orange+P	Green+P	Brown+P	Gray+P	White+P
No.	19	20	21	22	23	24

Color	Red+P	Natural+P	Yellow+P	Violet+P	Pink+P	Aqua+P
-------	-------	-----------	----------	----------	--------	--------

“P” means Point mark。P代表的是喷墨。

## Marking 标识

The optical fiber drop cable shall have sequentially numbered length marking at intervals of approximately 1 meter. The starting number of ordering length for any coil shall begin with zero meter.

The accuracy of the measurement of length marking shall be held within the limits of  $\pm 1\%$ .

- a) Manufacturer's name
- b) Type of wire
- c) Year and month of manufacture
- d) Length marking each meter along the wire