


**Pipeline and non-self-supporting aerial optical Cable GYTA**

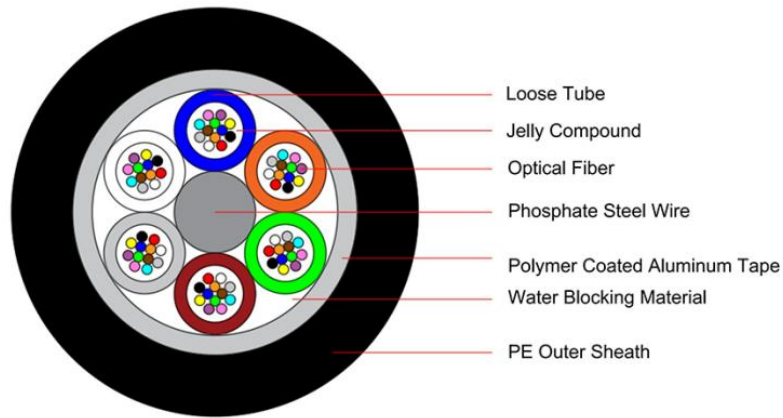

**Technical data**

|                                 |                     |                   |                   |                   |                   |                   |
|---------------------------------|---------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Fibers of cable                 |                     | 2-30              | 32-60             | 62-72             | 74-84             | 86-96             |
| Fiber Model                     |                     | G.652D            | G.652D            | G.652D            | G.652D            | G.652D            |
| Design(StrengthMember+Tube)     |                     | 1+5               | 1+5               | 1+6               | 1+7               | 1+8               |
| Central Strength Member         | Material            | Steel Wire        | Steel Wire        | Steel Wire        | Steel Wire        | Steel Wire        |
|                                 | Diameter (±0.05) mm | 1.4               | 1.4               | 2.0               | 2.0+0.7           | 2.0+1.2           |
| Loose Tube                      | Material            | PBT               | PBT               | PBT               | PBT               | PBT               |
|                                 | Diameter (±0.1) mm  | 1.65              | 1.9               | 1.9               | 1.9               | 1.9               |
|                                 | Thickness(±0.05) mm | 0.25              | 0.3               | 0.3               | 0.3               | 0.3               |
| Water Blocking layer (Material) |                     | Flooding Compound | Flooding Compound | Flooding Compound | Flooding Compound | Flooding Compound |
| Armoring                        | Material            | Aluminum Tape     | Aluminum Tape     | Aluminum Tape     | Aluminum Tape     | Aluminum Tape     |
|                                 | Thickness(±0.02) mm | 0.20              | 0.20              | 0.20              | 0.20              | 0.20              |
| Outer Sheath                    | Material            | MDPE              | MDPE              | MDPE              | MDPE              | MDPE              |
|                                 | Thickness (±0.1) mm | 1.6               | 1.6               | 1.6               | 1.6               | 1.6               |
| Cable Diameter (±0.2) mm        |                     | 8.9               | 9.4               | 10                | 10.7              | 11.2              |
| Cable Weight (±10.0) kg/km      |                     | 72                | 79                | 100               | 112               | 120               |

|                                 |                      |                    |                    |                    |                    |                    |                    |
|---------------------------------|----------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Fibers of cable                 |                      | 98-108             | 110-120            | 122-132            | 134-144            | 146-216            | 218-300            |
| Fiber Model                     |                      | G.652D             | G.652D             | G.652D             | G.652D             | G.652D             | G.652D             |
| Design(StrengthMember+Tube)     |                      | 1+9                | 1+10               | 1+11               | 1+12               | 1+6+12             | 1+9+15             |
| Central Strength Member         | Material             | Steel Wire         | Steel Wire         | Steel Wire         | Steel Wire         | Steel Wire         | Steel Wire         |
|                                 | Diameter (±0.05) mm  | 2.0+1.8            | 2.0+2.5            | 2.0+3.1            | 2.0+3.7            | 2.0                | 2.0+1.8            |
| Loose Tube                      | Material             | PBT                | PBT                | PBT                | PBT                | PBT                | PBT                |
|                                 | Diameter (±0.1) mm   | 1.9                | 1.9                | 1.9                | 1.9                | 1.9                | 1.9                |
|                                 | Thickness (±0.05) mm | 0.3                | 0.3                | 0.3                | 0.3                | 0.3                | 0.3                |
| Water Blocking layer (Material) |                      | Floodin g Compound | Floodin g Compound | Floodin g Compound | Floodin g Compound | Floodin g Compound | Floodin g Compound |
| Armoring                        | Material             | Aluminu m Tape     | Aluminu m Tape     | Aluminu m Tape     | Aluminu m Tape     | Aluminu m Tape     | Aluminu m Tape     |
|                                 | Thickness (±0.02) mm | 0.20               | 0.20               | 0.20               | 0.20               | 0.20               | 0.20               |
| Outer Sheath                    | Material             | MDPE               | MDPE               | MDPE               | MDPE               | MDPE               | MDPE               |
|                                 | Thickness (±0.1) mm  | 1.6                | 1.6                | 1.6                | 1.6                | 1.6                | 1.6                |
| Cable Diameter (±0.2) mm        |                      | 11.8               | 12.5               | 13.1               | 13.7               | 13.8               | 15.6               |
| Cable Wewght (±10.0) kg/km      |                      | 130                | 144                | 157                | 170                | 172                | 214                |

### Fibre Color

|       |      |        |        |        |      |       |
|-------|------|--------|--------|--------|------|-------|
| No.   | 1    | 2      | 3      | 4      | 5    | 6     |
| Color | Blue | Orange | Green  | Brown  | Gray | White |
| No.   | 7    | 8      | 9      | 10     | 11   | 12    |
| Color | Red  | Black  | Yellow | Violet | Pink | Aqua  |

### Loose Tube Color

|       |      |        |       |       |      |       |     |       |        |        |      |      |
|-------|------|--------|-------|-------|------|-------|-----|-------|--------|--------|------|------|
| No.   | 1    | 2      | 3     | 4     | 5    | 6     | 7   | 8     | 9      | 10     | 11   | 12   |
| Color | Blue | Orange | Green | Brown | Gray | White | Red | Black | Yellow | Violet | Pink | Aqua |
| No.   | 13   | 14     | 15    | 16    | 17   | 18    | 19  | 20    | 21     | 22     | 23   | 24   |
| Color | Blue | Orange | Green | Brown | Gray | White | Red | Black | Yellow | Violet | Pink | Aqua |

### The properties of single mode optical fiber (ITU-T Rec. G.652.D)

| Item   | Specification                    |
|--|----------------------------------|
| Fiber type   | Single mode                      |
| Fiber material                                       | Doped silica                     |
| Attenuation coefficient                              |                                  |
| @ 1310 nm  | ≤ 0.35 dB/km                     |
| @ 1383 nm  | ≤ 0.32 dB/km                     |
| @ 1550 nm  | ≤ 0.21 dB/km                     |
| @ 1625 nm  | ≤ 0.30 dB/km                     |
| Point discontinuity                                  | ≤ 0.05 dB                        |
| Cable cut-off wavelength                             | ≤ 1260 nm                        |
| Zero-dispersion wavelength                           | 1300 ~ 1324 nm                   |
| Zero-dispersion slope                                | ≤ 0.092 ps/(nm <sup>2</sup> .km) |
| Chromatic dispersion                                 |                                  |
| @ 1288 ~ 1339 nm                                     | ≤ 3.5 ps/(nm. km)                |
| @ 1271 ~ 1360 nm                                     | ≤ 5.3 ps/(nm. km)                |
| @ 1550 nm  | ≤ 18 ps/(nm. km)                 |
| @ 1625 nm  | ≤ 22 ps/(nm. km)                 |
| PMD <sub>Q</sub> (Quadrature average*)               | ≤ 0.2 ps/km <sup>1/2</sup>       |
| Mode field diameter @ 1310 nm                        | 9.2±0.4 μm                       |
| Core / Clad concentricity error                      | ≤ 0.5 μm                         |
| Cladding diameter                                    | 125.0 ± 0.7 μm                   |
| Cladding non-circularity                             | ≤ 1.0%                           |
| Primary coating diameter                             | 245 ± 10 μm                      |
| Proof test level                                     | 100 kpsi (=0.69 Gpa), 1%         |
| Temperature dependence<br>0°C~ +70°C @ 1310 & 1550nm | ≤ 0.1 dB/km                      |

### Main mechanical & environmental performance test

| Item                                | Test Method   | Acceptance Condition  |
|-------------------------------------|---|---|
| Tensile Strength<br>IEC60794-1-2-E1 | - Load: 1500N<br>- Length of cable: about 50m                           | - Loss change ≤ 0.1 dB @1550 nm<br>- No fiber break and no sheath damage. |
| Crush Test<br>IEC 60794-1-2-E3      | - Load: 1000N/100mm<br>- Load time: 1min                                | - Loss change ≤ 0.1dB@1550nm<br>- No fiber break and no sheath damage.    |
| Impact Test<br>IEC 60794-1-2-E4     | - Points of impact: 3<br>- Times of per point: 1<br>- Impact energy: 5J | - Loss change ≤ 0.1dB@1550nm<br>- No fiber break and no sheath damage.    |

|   |   |   |
|---|---|---|
| <p>Temperature Cycling Test<br/>IEC 60794-1-22-F1</p> | <p>- Temperature step:<br/>+20°C→-40°C→+70°C →+20°C<br/>- Time per each step: 12 hrs<br/>- Number of cycle: 2</p> | <p>- Loss change ≤ 0.1 dB/km@1550 nm<br/>- No fiber break and no sheath damage.</p> |
|---|---|---|

## Sheath marking

The optical fiber drop cable shall have sequentially numbered length marking at intervals of approximately 1 meter. The starting number of ordering length for any coil shall begin with zero meter. The accuracy of the measurement of length marking shall be held within the limits of  $\pm 1\%$ .

- a) Manufacturer's name
- b) Type of wire
- c) Year and month of manufacture
- d) Length marking each meter along the wire