


GYTC8Y Outdoor Communication Cable (G652D)

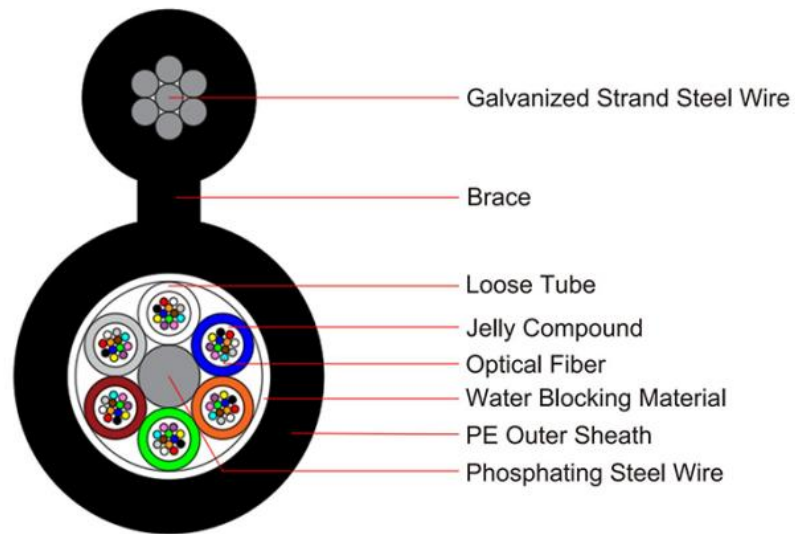

Technical Data Sheet

No. of cable		2-30	32-60	62-72	74-84	84-96	98-108
Fiber Model		G.652D	G.652D	G.652D	G.652D	G.652D	G.652D
Design (Strength Member+Tube&Filler)		1+5	1+5	1+6	1+7	1+8	1+9
Central Strength Member	Material	Steel Wire	Steel Wire	Steel Wire	Steel Wire	Steel Wire	Steel Wire
	Diameter (± 0.05) mm	1.4	1.4	2	2	2	2
Loose Tube	Material	PBT	PBT	PBT	PBT	PBT	PBT
	Diameter (± 0.06) mm	1.65	1.9	1.9	1.9	1.9	1.9
	Thickness (± 0.03) mm	0.25	0.3	0.3	0.3	0.3	0.3
Outer Sheath①	Material	MDPE	MDPE	MDPE	MDPE	MDPE	MDPE
	Thickness (± 0.2) mm	1.6	1.6	1.6	1.6	1.6	1.6

Outer Sheath②	Material	MDPE	MDPE	MDPE	MDPE	MDPE	MDPE
	Thickness (± 0.2) mm	1.5	1.5	1.5	1.5	1.5	1.5
Web	Material	MDPE	MDPE	MDPE	MDPE	MDPE	MDPE
	Size (± 0.5) mm	2.0*3.0	2.0*3.0	2.0*3.0	2.0*3.0	2.0*3.0	2.0*3.0
Cable Diameter (W×H) mm		7.9*16.6	8.4*17.1	9*17.7	10.2*19.2	10.8*19.8	11.5*20.5
Cable Weight (± 10) kg/km		120	128	147	176	176	198
Temperature range (°C)	Installation	-20~+60	-20~+60	-20~+60	-20~+60	-20~+60	-20~+60
	Transport&Storage	-40~+70	-40~+70	-40~+70	-40~+70	-40~+70	-40~+70
	Operation	-40~+70	-40~+70	-40~+70	-40~+70	-40~+70	-40~+70

No. of cable		110-120	122-132	134-144	146-216	218-288	290-300
Fiber Model		G.652D	G.652D	G.652D	G.652D	G.652D	G.652D
Design (Strength Member+Tube&Filler)		1+10	1+11	1+12	1+6+12	1+9+15	1+9+16
Central Strength Member	Material	Steel Wire	Steel Wire	Steel Wire	Steel Wire	Steel Wire	Steel Wire
	Diameter (± 0.05) mm	2	2	2	2	2	2
Loose Tube	Material	PBT	PBT	PBT	PBT	PBT	PBT
	Diameter (± 0.06) mm	1.9	1.9	1.9	1.9	1.9	1.9
	Thickness (± 0.03) mm	0.3	0.3	0.3	0.3	0.3	0.3
Outer	Material	MDPE	MDPE	MDPE	MDPE	MDPE	MDPE

Sheath①	Thickness (±0.2) mm	1.6	1.6	1.6	1.6	1.6	1.6
Outer Sheath②	Material	MDPE	MDPE	MDPE	MDPE	MDPE	MDPE
	Thickness (±0.2) mm	1.5	1.5	1.5	1.5	1.5	1.5
Web	Material	MDPE	MDPE	MDPE	MDPE	MDPE	MDPE
	Size (±0.5) mm	2.0*3.0	2.0*3.0	2.0*3.0	3.0*4.0	3.0*4.0	3.0*4.0
Cable Diameter (W×H) mm		12.1*21. 1	12.7*21. 9	12.8*23. 6	12.8*25. 4	14.6*25. 4	14.6*25. 4
Cable Weight (±10) kg/km		198	222	222	250	293	293
Temperat ure range (°C)	Installation	-20~+60	-20~+60	-20~+60	-20~+60	-20~+60	-20~+60
	Transport& Storage	-40~+70	-40~+70	-40~+70	-40~+70	-40~+70	-40~+70
	Operation	-40~+70	-40~+70	-40~+70	-40~+70	-40~+70	-40~+70

Fibre Color

No.	1	2	3	4	5	6	7	8	9	10	11	12
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Violet	Pink	Aqua
No.	13	14	15	16	17	18	19	20	21	22	23	24
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Violet	Pink	Aqua

Note: The colors of the fibers from No. 12 to 24 are all circular chromatograms.

Loose Tube Color

No.	1	2	3	4	5	6	7	8	9	10	11	12
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Violet	Pink	Aqua

No.	13	14	15	16	17	18	19	20	21	22	23	24
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Violet	Pink	Aqua

The properties of single mode optical fiber (ITU-T Rec. G.652.D)

Item	Specification
Fiber type	Single mode
Fiber material	Doped silica
Attenuation coefficient @ 1310 nm @ 1383 nm @ 1550 nm @ 1625 nm	≤ 0.35 dB/km ≤ 0.32 dB/km ≤ 0.21 dB/km ≤ 0.24 dB/km
Point discontinuity	≤ 0.05 dB
Cable cut-off wavelength	≤ 1260 nm
Zero-dispersion wavelength	1300 ~ 1324 nm
Zero-dispersion slope	≤ 0.092 ps/(nm ² .km)
Chromatic dispersion @ 1288 ~ 1339 nm @ 1271 ~ 1360 nm @ 1550 nm @ 1625 nm	≤ 3.5 ps/(nm. km) ≤ 5.3 ps/(nm. km) ≤ 18 ps/(nm. km) ≤ 22 ps/(nm. km)
PMD _Q (Quadrature average*)	≤ 0.2 ps/km ^{1/2}
Mode field diameter @ 1310 nm	9.2±0.4 μm
Core / Clad concentricity error	≤ 0.5 μm
Cladding diameter	125.0 ± 0.7 μm
Cladding non-circularity	$\leq 1.0\%$
Primary coating diameter	245 ± 10 μm
Proof test level	100 kpsi (=0.69 Gpa), 1%
Temperature dependence 0°C ~ +70°C @ 1310 & 1550nm	≤ 0.1 dB/km

Main mechanical & environmental performance test

Item	Test Method	Acceptance Condition
Tensile Strength IEC 60794-1-2-E1	- Load: 1500N - Length of cable: about 50m	- Fiber strain $\leq 0.33\%$ - Loss change $\leq 0.1 \text{ dB @ } 1550 \text{ nm}$ - No fiber break and no sheath damage.
Crush Test IEC 60794-1-2-E3	- Load: 1000N/100mm - Load time: 1min	- Loss change $\leq 0.1 \text{ dB @ } 1550 \text{ nm}$ - No fiber break and no sheath damage.
Impact Test IEC 60794-1-2-E4	- Points of impact: 3 - Times of per point: 1 - Impact energy: 5J	- Loss change $\leq 0.1 \text{ dB @ } 1550 \text{ nm}$ - No fiber break and no sheath damage.
Temperature Cycling Test IEC 60794-1-2-F4	- Temperature step: +20oC $\rightarrow$ -40oC $\rightarrow$ +70oC $\rightarrow$ +20oC - Time per each step: 12 hrs - Number of cycle: 2	- Loss change $\leq 0.1 \text{ dB/km @ } 1550 \text{ nm}$ - No fiber break and no sheath damage.

Sheath marking

The optical fiber drop cable shall have sequentially numbered length marking at intervals of approximately 1 meter. The starting number of ordering length for any coil shall begin with zero meter. The accuracy of the measurement of length marking shall be held within the limits of $\pm 1\%$.

- Manufacturer's name
- Type of wire
- Year and month of manufacture
- Length marking each meter along the wire